
QUESTIONS?



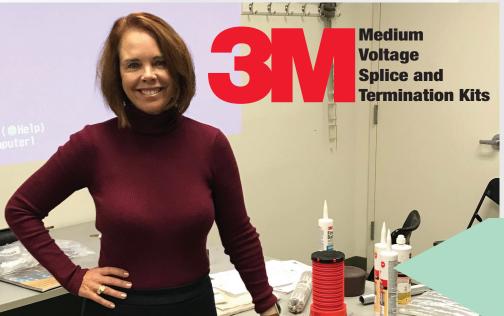

Catherine has the answers!
The Swift/3M Team is here to help, with knowledge and support unparalleled in the industry area.

- Project consultations
- Needs assessments
- Certified application training
- Jobsite walkthroughs

Catherine Clifford

3M Certified Specialist cclifford@swiftelectrical.com (201)957-2243

3M Medium Voltage & Accessories

Swift has the products and the expertise you need for medium voltage. Whether it's timesaving splice kits, termination kits, or cold shrink products, we have you covered.

3M™ Cold Shrink Shielded Splice Kits

- · For splicing shielded, solid dielectric, power cables
- Each kit contains all the materials required to construct three (3) single conductor splices on Tape Shield, Wire Shield or UniShield[®] cables Connectors and optional ground strap not included
- The kit can also be used to splice a shielded to a non-shielded 5/8 kV cable

Medium Voltage Termination Kits

- Provides a void-free seal to tape shield, wire shield and UniShield® power cables
- · High dielectric-constant material regulates the distribution of electric field stress
- Suitable for indoor applications
- Silicone rubber insulation offers durability and reduces leakage currents in damp conditions

3M Scotchlok™ Copper/Aluminum Compression Lugs 40000 Series

are made of high conductivity aluminum and designed to terminate **aluminum or copper conductors**. The two-hole lug design provides increased secureness, resists electrolytic corrosion, installs using standard industry tooling. Product in stock ranges from 1/0 AWG through 750 kcmil.

5551	3M [™] Cold Shrink Rubber Splice Kit			
3/kit	Conductor sizes 6-4/0 AWG, Cu.			
5552	3M™ Cold Shrink Splice Kit			
3/kit	Conductor sizes 4/0 AWG-500kcmil, Cu.			
QS4-15SP-2-4/0-BCA*	3M™ Cold Shrink QS4 Integrated Splice Conductor sizes #2 thru 4/0, Cu., Kit goes up to 15kv*			
QS4-15SP-4/0-500-BCA*	3M™ Cold Shrink QS4 Integrated Splice			
1/kit	Conductor sizes 4/0 thru 500mcm, Cu., Kit goes up to 15kv*			

7622-T-110	3M™ Cold Shrink QT3 TermsTermination Kit Tape/Wire/UniShield® Shielding, 5-15 kV, Insulation OD 0.64-1.08 in, 3/kit
7623-T-110	3M™ Cold Shrink QT3 Terms Termination Kit Tape/Wire/UniShield®, 5-15kV, Insulation OD 0.72-1.29 in, 3/kit
7624-T-110	3M™ Cold Shrink QT3 Terms Termination Kit Tape/Wire/UniShield®, 5-15 kV, Insulation OD 0.92-1.18 in, 3/kit
7625-T-110	3M™ Cold Shrink QT3 Terms Termination Kit Tape Shielded, 5-15 kV, Insulation OD 1.18-1.51 in, 3/kit

3M Catalog #	3M Product Description
40132	3M™ Scotchlok™ Aluminum Two Hole Lug 1/0 AWG
40137	3M™ Scotchlok™ Aluminum Two Hole Lug 2/0 AWG
40141	3M™ Scotchlok™ Aluminum Two Hole Lug 3/0 AWG
40145	3M™ Scotchlok™ Aluminum Two Hole Lug 4/0 AWG
40149	3M™ Scotchlok™ Aluminum Two Hole Lug 250 kcmil
40156	3M™ Scotchlok™ Aluminum Two Hole Lug 350 kcmil
40166	3M™ Scotchlok™ Aluminum Two Hole Lug 500 kcmil
40170	3M™ Scotchlok™ Aluminum Two Hole Lug 600 kcmil
40172	3M™ Scotchlok™ Aluminum Two Hole Lug 750 kcmil

ALL KITS IN STOCK



Now In Stock!

3M

Heat / Cold Shrink + Caps

A Full Range of Sizes - NOW IN STOCK

Heat/Cold Shrink and End Caps IN STOCK AT SWIFT

Demanding conditions call for heavy-duty abrasion protection. With 3M Heavy Wall Tubing, you can get the level of protection you want from a broad range of products.





HEAT SHRINK (Heavy Wall)	Wire Range (AWG)	Heat Shrink End Caps	Min-Max Range	COLD SHRINK	Wire Range (AWG)	Cold Shrink End Caps	Min-Max Range
ITCSN-0400-6	12 - 6						
ITCSN-0800-6	8 - 1/0	SKE-15/40	.59 to 1.26	8424-8	10AWG -1/0	EC-1	0.46 - 0.82
ITCSN-1100-6	2 - 4/0	SKE-25/63	1.00-1.97	8426-9	2/0 AWG to 250 MCM	EC-2	0.63 - 1.18
ITCSN-1500-9	3/0 - 400 kcmil	SKE-30/76	1.18 to 2.36	8427-12	250 to 400 MCM	EC-3	1.02 - 1.94
ITCSN-2000-9	250 - 750 kcmil	SKE-45/100	1.77 to 3.15	8428-12	500 to 800 MCM	EC-4	1.79 - 3.32

22-02/07